




Laminating ID CARD PRINTER

# SMART-51L

SMART-51 Series *is Value for Everyone!*

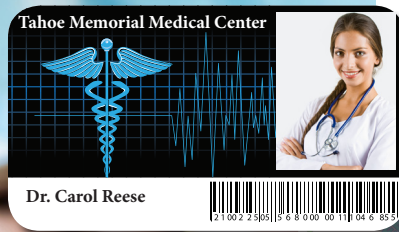

- Single or Dual Sided Laminating ID Card Printer
- Patented 8-Second Heat Up Time
- Fast, Quiet with User Friendly LCD
- FINE™ Imaging Technology
- Lowest Cost per Print
- 3 YEAR WARRANTY



## INCREASE CARD LIFE, INCREASE SECURITY, DECREASE COSTS

IDP's SMART-51L printer produces high quality printed and laminated cards for government credentials, student photo identification, and secured access control badges.

Ideally suited for today's increased security on identification cards, the SMART-51L with patented Direct Lamination™ technology provides an ultra-fast laminating solution with state-of-the-art security features. When it comes to security and reliability, the SMART-51L provides premium protection.

### Requires High Security ID Cards

- National ID Cards
- Government & Military ID Cards
- High Security Access Control ID Cards
- Law Enforcement & Correctional Facility ID Cards
- Driver Licenses
- Airport ID Cards

### FEATURES

- Single or Dual Sided Printing & Laminating
- 8 Second Heat Up Time with Patented Direct Lamination™
- Printing & Laminating Speed: Max. 22 sec/card (YMCK & Single Lamination)
- 300dpi with Edge to Edge Printing
- 51S & 51D Field Upgradable to 51L
- 2 Lines LCD with 2 LED Buttons for Front Operation
- Holographic Lamination for Visual Security & Card Durability
- Installable Encoders: MS, Contact & Contactless
- Upgradable Ethernet



### ISSUANCE

SMART ID ensures accurate card issuance and data management with your SMART series of printers. This application offers simple design tools to allow the user to create a truly customized card within minutes. SMART ID offers advanced user tools such as database connections, camera and signature scanners plug-in support, as well as smart card reading and encoding.

- Design and print (Image, Photo and Text)
- 1D & 2D Barcode printing
- Auto portrait (Auto face detection, adjustment of size & position)
- Printing of sequential numbers
- Card design templates
- Plug-in for supporting external devices (Sign pad, Camera, Scanner)
- Convenient card issuance and data management
- Magnetic stripe (MS), contact & contactless smart card encoding by using plug-in program



### SECURITY

The SMART series printers come with highly effective and tested physical and electronic security features.

- PASSWORD verification with administrator and user authentications
- PC AUTHENTICATION locks the SMART printer to a specific PC to render it useless if stolen
- DATA ENCRYPTION over USB and SSL (secure socket layer) over Ethernet
- PHYSICAL LOCKS are standard on the SMART-70 and an optional feature on the SMART-51 Series



### NETWORKING

The SMART series offers "single-wire" printing and encoding.

- The SMART Ethernet module can not only print over your network, but can also be configured to encode magnetic stripes, contact IC chips and contactless smart cards over your network
- The SMART Ethernet module can be configured to accept "open card protocol" print commands for direct printing without a driver

**Specifications****PRINTING**

- Print Type Dye-Sublimation
- Print Area Edge to Edge
- Resolution 300dpi
- Dual Sided Printing Dual Sided Printing

**CARD**

- Card Feeding Automatic
- Card Size ISO CR80 or ISO CR79 (Option-Factory Installed)
- Card Thickness 0.38mm (15mil), 1.0mm (40mil)
- Card Type PVC, PET, Composite PVC

**PRINT SPEED**

- Monochrome 5 sec./card (720 cards/hour)
- YMCKO Max. 17 sec./card (212 cards/hour)
- YMCKOK Max. 22 sec./card (164 cards/hour)

**CAPACITY**

- Input Hopper 100 Cards / 200 Cards with cover open
- Output Hopper Front: 40 cards / Rear: 100 Cards  
\*Optional Rear-Side Stacker

**LAMINATING**

- Mode Single & Dual
- Film (clear & holographic) 0.6mil, 1.0mil
- Speed | Simultaneous 22 sec./card (YMCK), 32 sec./card (YMCKK)  
(Single Lamination)
- One by One 43 sec./card (YMCK), 53 sec./card (YMCKK)  
(Single Lamination)

**SYSTEM**

- Memory 64MB RAM
- Display 2 Line LCD
- Control Panel 2 LED Buttons
- Supported Platforms Microsoft Windows 7/ 8 /10, Mac OS, Linux
- Communication USB, Ethernet (Option)
- Power Supply Free Voltage (AC100/200V, 50~60Hz)
- Power Consumption 96W
- Temperature/Humidity 15~35°C/35~70%

**DIMENSIONS**

- Millimeter (WxLxH) 165 x 675 x 210
- Inch (WxLxH) 6.5 x 26.6 x 8.3

**WEIGHT**

- Kg/lbs 8.8/19.4

**ENCODING OPTIONS**

- Magnetic ISO7811 (Track I, II, III Read/Write, HiCo/LoCo), JIS II
- Contact ISO 7816 (ID-1)
- Contactless MIFARE, ISO 14443 (Type A/B), ISO 15693  
DESFIRE, iCLASS

**CERTIFICATIONS****Consumables**

659366 YMCKO	659376 YMCKOK	659380 YMCFKO	659378 HYMCKO
Full Color Ribbon with Resin Black & Overlay	Full Color Ribbon with Resin Black & Overlay & Black for Back Side	Full Color Ribbon with UV Panel, Resin Black and Overlay	Half Panel Size Color Ribbon with Resin Black and Overlay
			
COLOR RIBBONS	250 Cards/Roll	200 Cards/Roll	350 Cards/Roll

**Holographic Designs**

Specifications and availability may change without notice.

**Part Numbers:**

SMART-51L	651400
SMART-51LN (Eth)	651410
Contactless Enc. (USB)	651360
Contactless Enc. (Eth)	651362
Contact IC Enc.	651359
Mag Encoding	651356
Clear Lam., 250/Cards	659390
Holo. Lam., 250/Cards	659392

Add "K" to any printer part number for a kit (1 YMCKO Ribbon, 1- 100pk Cards, & 1 Long Cleaning Card)

**IDP Corp., Ltd.**

OFFICE: Room 601m 50, Digital-ro 33-gil, Guro-gu, Seoul, 152-742, Korea  
TEL: +82-2-6099-3700  
FAX: +82-2-6099-3717  
E-MAIL: sales@idp-corp.com

**IDP Americas, Inc.**

OFFICE: 200 Circuit Drive, North Kingstown, RI 02852  
TEL: +1-401-400-7111  
FAX: +1-401-667-7445  
EMAIL: sales.na@idp-corp.com

[www.idp-corp.com](http://www.idp-corp.com)